



PROJECT NAME \_\_\_\_\_

CATALOG NUMBER \_\_\_\_\_

NOTES \_\_\_\_\_

FIXTURE TYPE \_\_\_\_\_

# T-SLIM Series

## Innovative Linear Light

### Highlights

- 50,000 Hours
- Up to 130 Lumens per Watt
- 5 Year Warranty
- Architectural Lighting
- Can Be Connected in Continuous Rows
- UL Approved



### Applications

- Offices
- Lobbies
- Hotels

## Ordering Guide

Example

LGL-TSLIM-2-SV-30-9

LGL	T-SLIM					
LUMINOS GLOBAL	PRODUCT	SIZE	VOLTAGE	CCT	T-BAR TYPE	ADDITIONAL OPTIONS
LGL	T-SLIM	2=2 Ft.	SV=100-277V	30=3000K	9=9/16	EM=Emergency Back Up
		4=4 Ft.	HV=347-480V	35=3500K	15=15/16	
				40=4000K		
				50=5000K		



PROJECT NAME \_\_\_\_\_

CATALOG NUMBER \_\_\_\_\_

NOTES \_\_\_\_\_

FIXTURE TYPE \_\_\_\_\_

# T-SLIM Series

## Innovative Linear Light


### Technical Overview

Performance Summary	Input Voltage	100-277V
	Input Frequency	50Hz-60Hz
	Lumen Efficacy	Up to 130 lm/w
	Light Output (Photopic)	2Ft. 10W-1,300 lumens
		4Ft. 20W-2,600 lumens
	Working Environment	Indoor
	Beam Angle	120°
	Kelvin Switch Options	3000K, 3500K, 4000K, 5000K
	CRI	80+
	Power Factor	>0.95
	IP Rating	IP44
	Life Span	50,000 hrs
	Dimming Options	0-10V
	Mounting Options	Recessed

### Dimensions




Model LGL-TSLIM-2 (15/16")




Model LGL-TSLIM-4 (9/16")



Model LGL-TSLIM-4 (15/16")

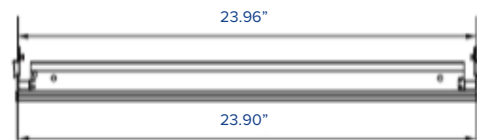

Model LGL-TSLIM-2 (9/16")

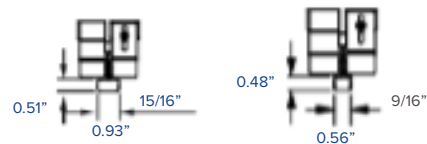

E475876