



PROJECT NAME \_\_\_\_\_

CATALOG NUMBER \_\_\_\_\_

NOTES \_\_\_\_\_

FIXTURE TYPE \_\_\_\_\_

# VLU Series

## Linear Fixture

### Highlights

- Light in Three Directions
- Internal Driver
- CCT Tunable Dip Switch (3000K, 3500K, 4000K)
- 100 Lumens per Watt
- 0-10V Dimming
- Seamless Continuous Connection
- 5 Year Warranty
- 50,000 Hours



### Applications

- Conference Rooms
- Offices
- Lobbies
- Hotels



## Ordering Guide

Example

LGL-VLU-4-SV-3CC-SD-R1

LGL	VLU					
LUMINOS GLOBAL	PRODUCT	SIZE	VOLTAGE	CCT	MOUNTING	CANOPY TYPE
LGL	VLU	4= 4Ft.	SV= 100-277V	3CC= 3000K, 3500K, 4000K	SD= Suspended on Dry Wall	R1= Round 1.6"
					ST= Suspended on T-Grid	R2= Round 4.5"
						REM= Round 4.5" EM
						S1= Square 1.6"
						S2= Square 4.5"
						SEM= Square 4.5" EM



PROJECT NAME \_\_\_\_\_  
CATALOG NUMBER \_\_\_\_\_  
NOTES \_\_\_\_\_  
FIXTURE TYPE \_\_\_\_\_


# VLU Series

## Linear Fixture

### Technical Overview

Performance Summary	Input Voltage	100-277V
	Input Frequency	50Hz-60Hz
	Lumen Efficacy	100 lm/w
	Light Output (Photopic)	4Ft. 40W- 4,000 lumens
	Working Environment	Indoor
	Kelvin Switch Options	3000K, 3500K, 4000K
	CRI	90+
	Power Factor	>0.9
	IP Rating	IP44
	Life Span	50,000 hrs
	Dimming Options	0-10V
	Mounting Options	Pendant

### Dimensions

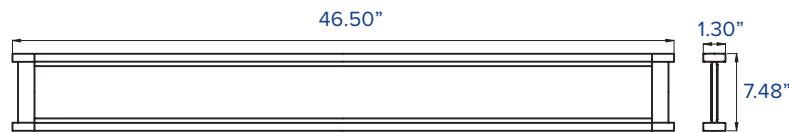

LGL-VLU-4-SV-35-SD









PROJECT NAME \_\_\_\_\_  
CATALOG NUMBER \_\_\_\_\_  
NOTES \_\_\_\_\_  
FIXTURE TYPE \_\_\_\_\_

# VLU Series

## Linear Fixture

### Canopy Style

R1	R2	REM	S1	S2	SEM
					
1.6 in. Round	4.5 in. Round	4.5 in. Round w/ EM Optional EM Indicator	1.6 in. Square	4.5 in. Square	4.5 in. Square w/ EM Optional EM Indicator

### Mounting Options



### Light Distribution

