


A Closer Look At Our Architectural Linear

VLG SERIES



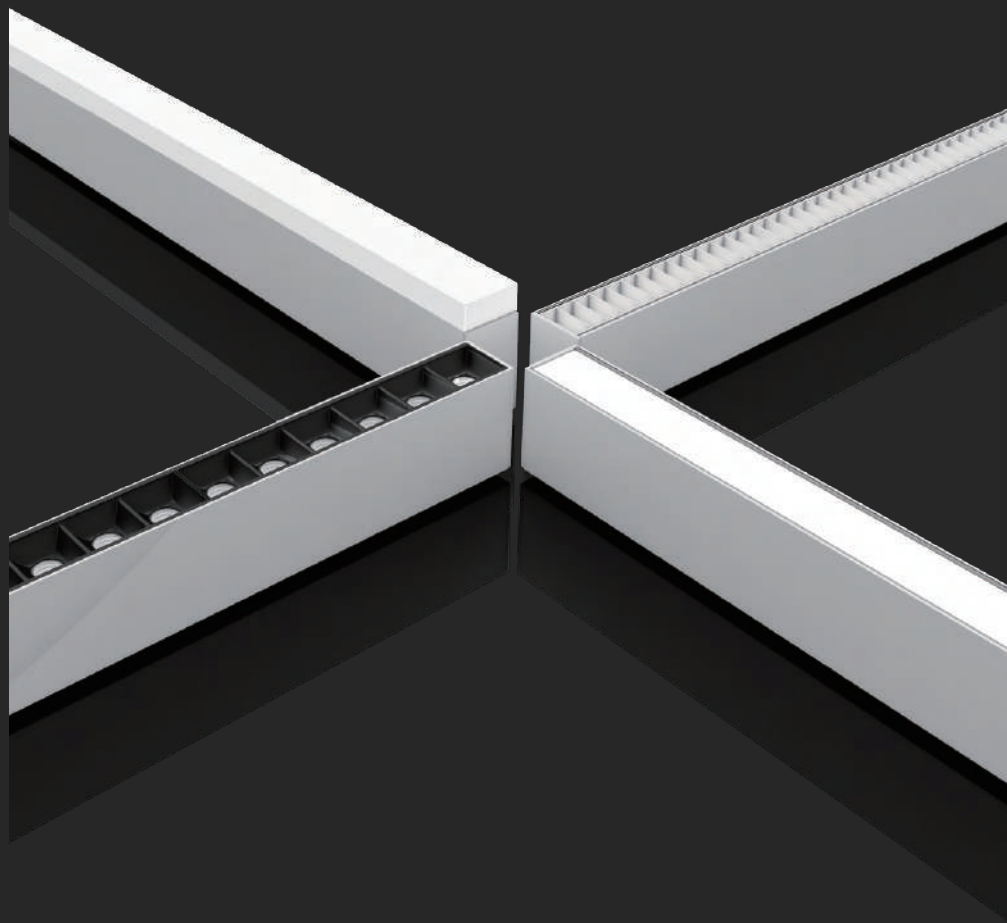


Features

- 1-10V Dimming
- 5 Year Warranty
- Several Diffuser Options
- Suitable for Damp Locations
- Various Installation Methods
- Multiple Lighting Distributions
- Available in 2ft, 4ft, and 8ft Lengths
- Wattage Selectable and CCT Selectable (Only available for 1.8" Slim and 2.3" Wide)
- Lighting Distribution Selectable (Only available for 2.3" Wide)
- Custom Patterns with Different Connectors




Finish


- Black 
- White 
- Custom 

Dimensions

One Clean Look

Our VLG Series are available in three different sizes, enabling designers to match the desired aesthetic for an interior space. All versions are available in 2ft, 4ft and 8ft lengths.

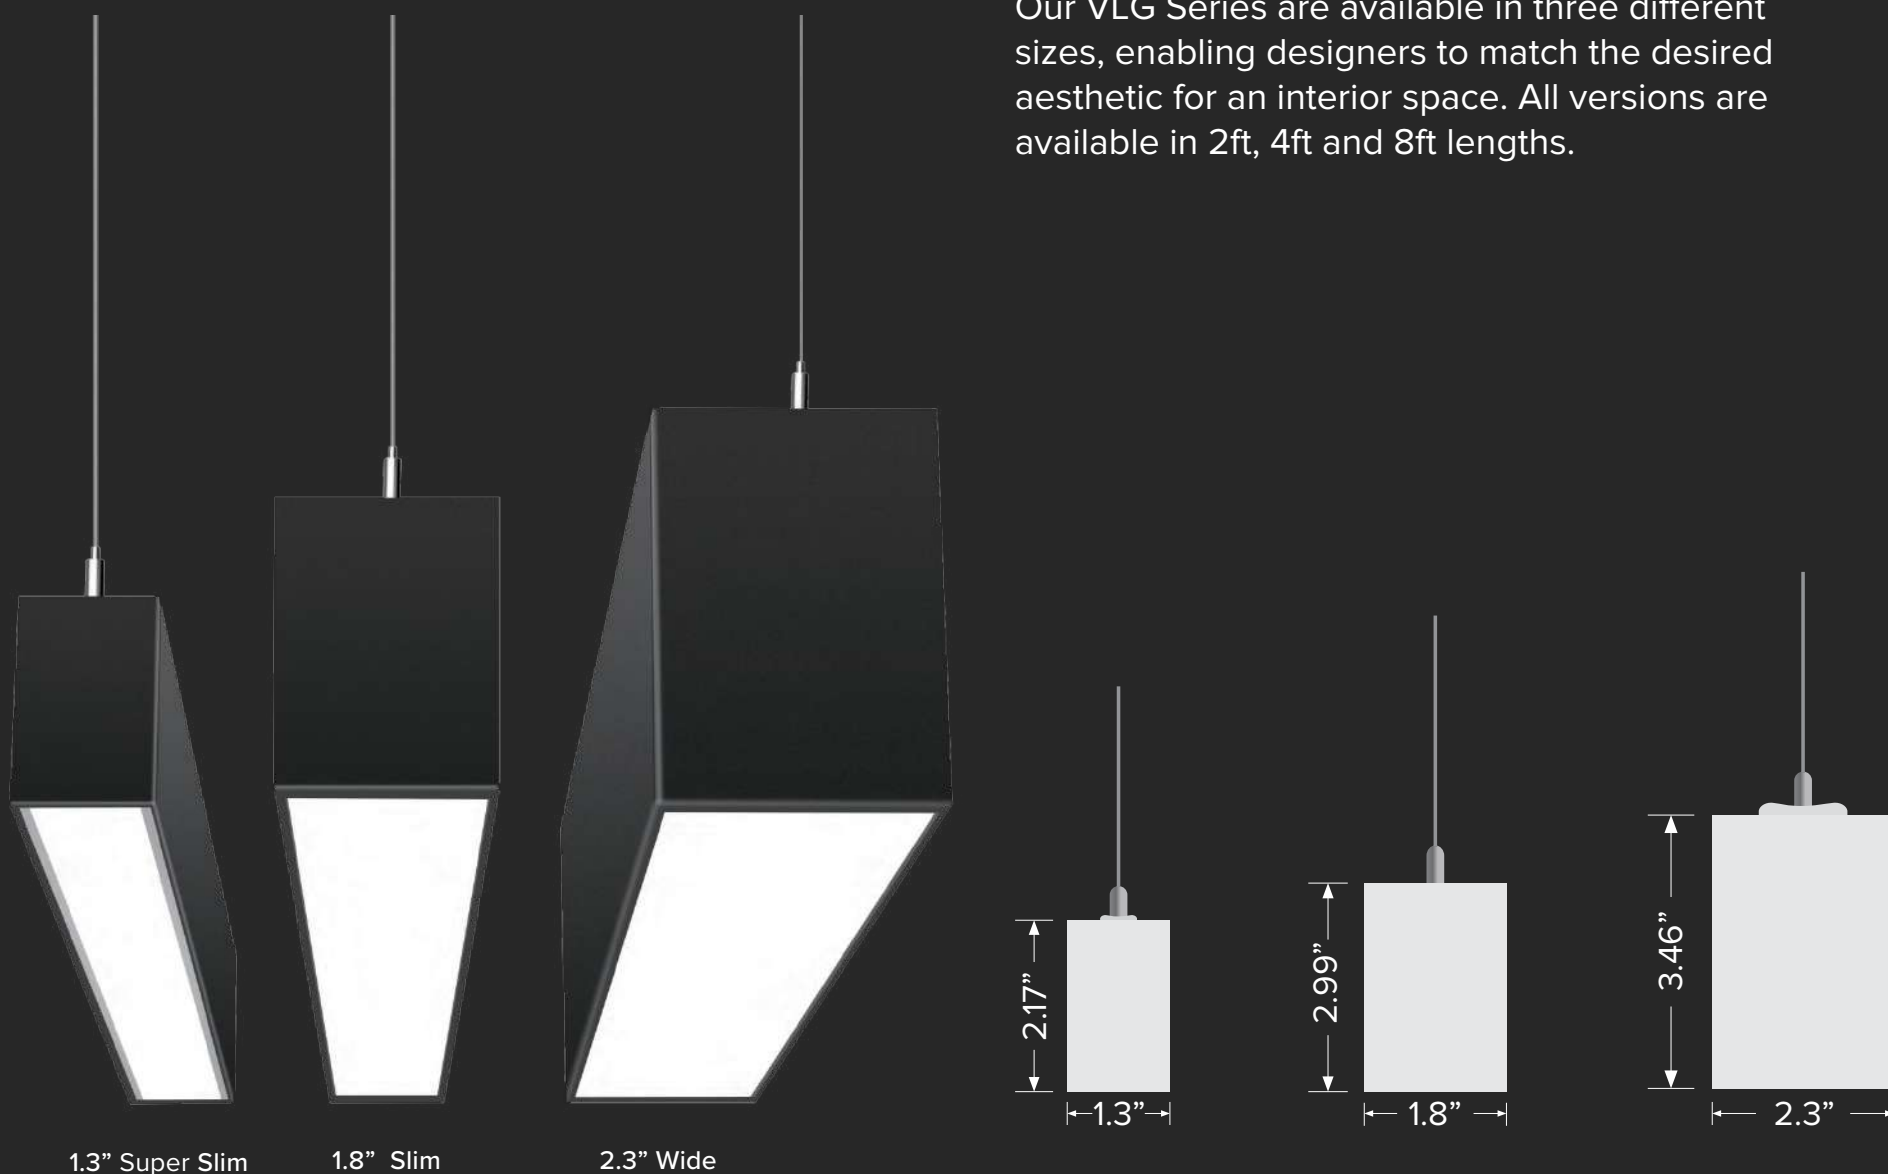

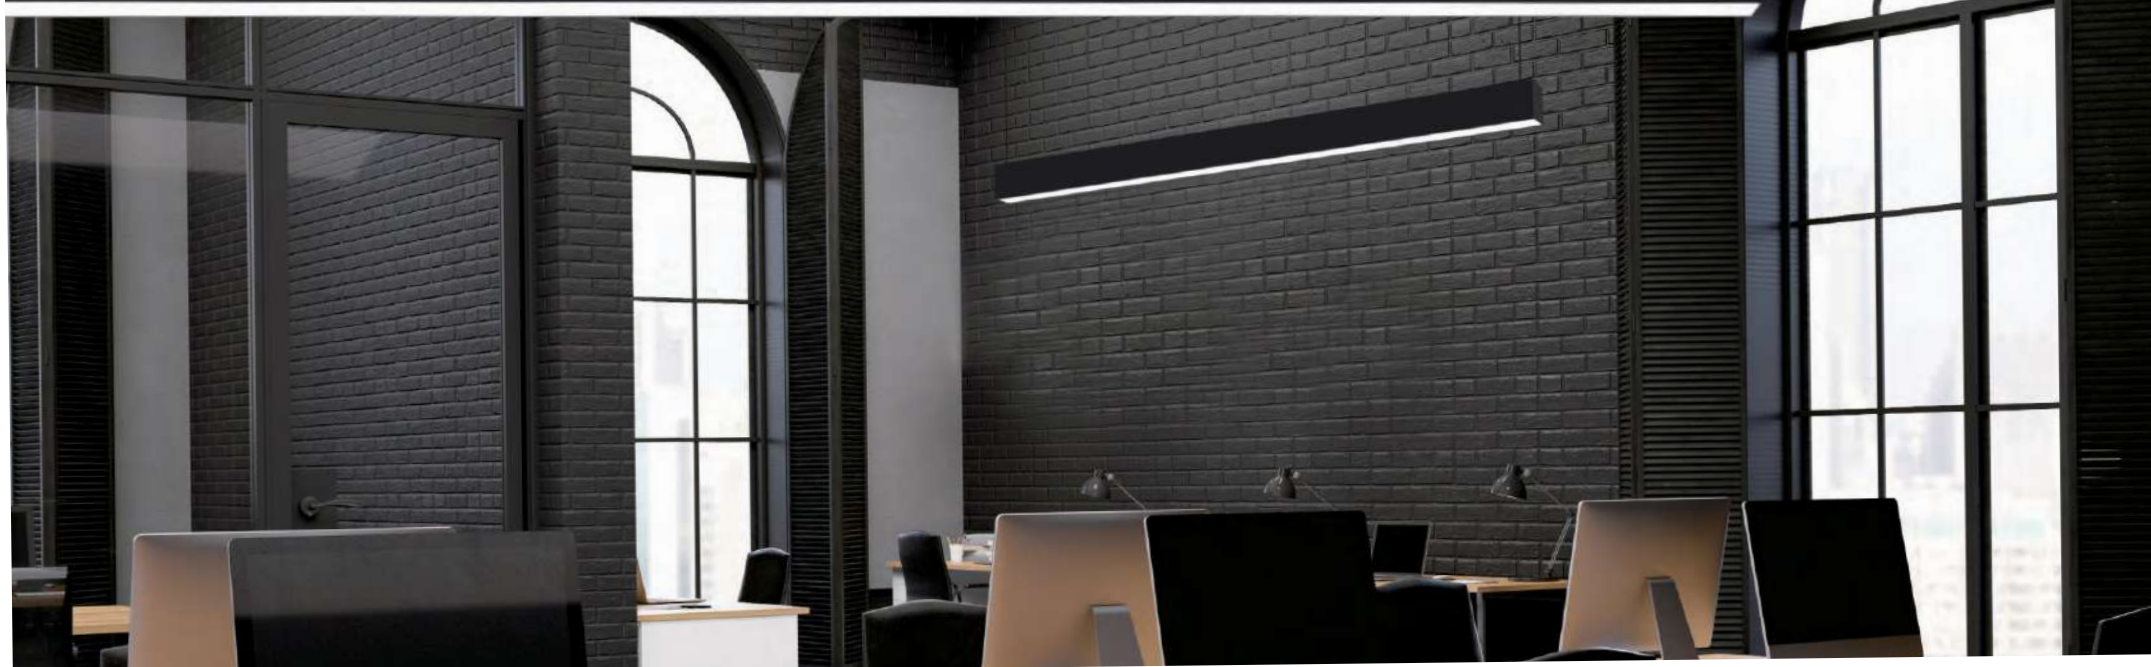

Installation Methods



Pendant



Surface



Wall Mount



Recessed



Special Features

1.8" Slim



CCT Selectable

Wattage Selectable

2.3" Wide



CCT Selectable

Wattage Selectable

Lighting Distribution Selectable


Installation Methods

T-grid or Dry Wall Compatible




Drop Ceiling / On Grid


Suspending the luminaire in the T-grid.
Compatible for various T-grid, including
9/16" Flat, 9/16" Slot, 15/16" Flat...




9/16" Flat Ceiling



9/16" Slot Ceiling



15/16" Flat Ceiling



15/16" Slot Ceiling

*Please see the installation instructions for more details.




Dry Wall / Off Grid


Various "hard Ceilings"
(Mount to J-box)




Connector Options



"L" Connector




"—" Connector

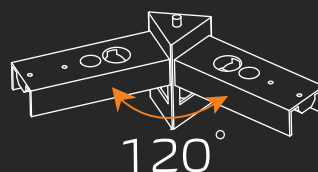


"V" Connector




"T" Connector

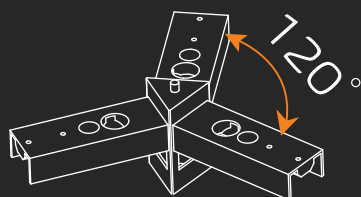

"Y" Connector

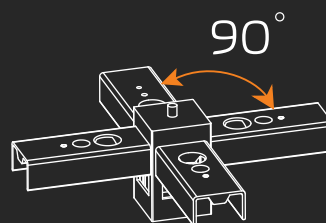

"+" Connector

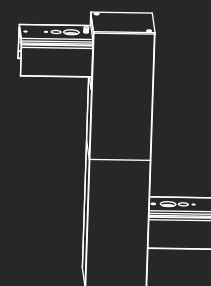

"Z" Connector


42' Continuous Roll-out Lens

Resulting in Seamless Architectural Integration (No junction gaps).


Create clean, seamless runs that are quicker to install with this quality press-in acrylic lens that will not crinkle or bow.




Optics

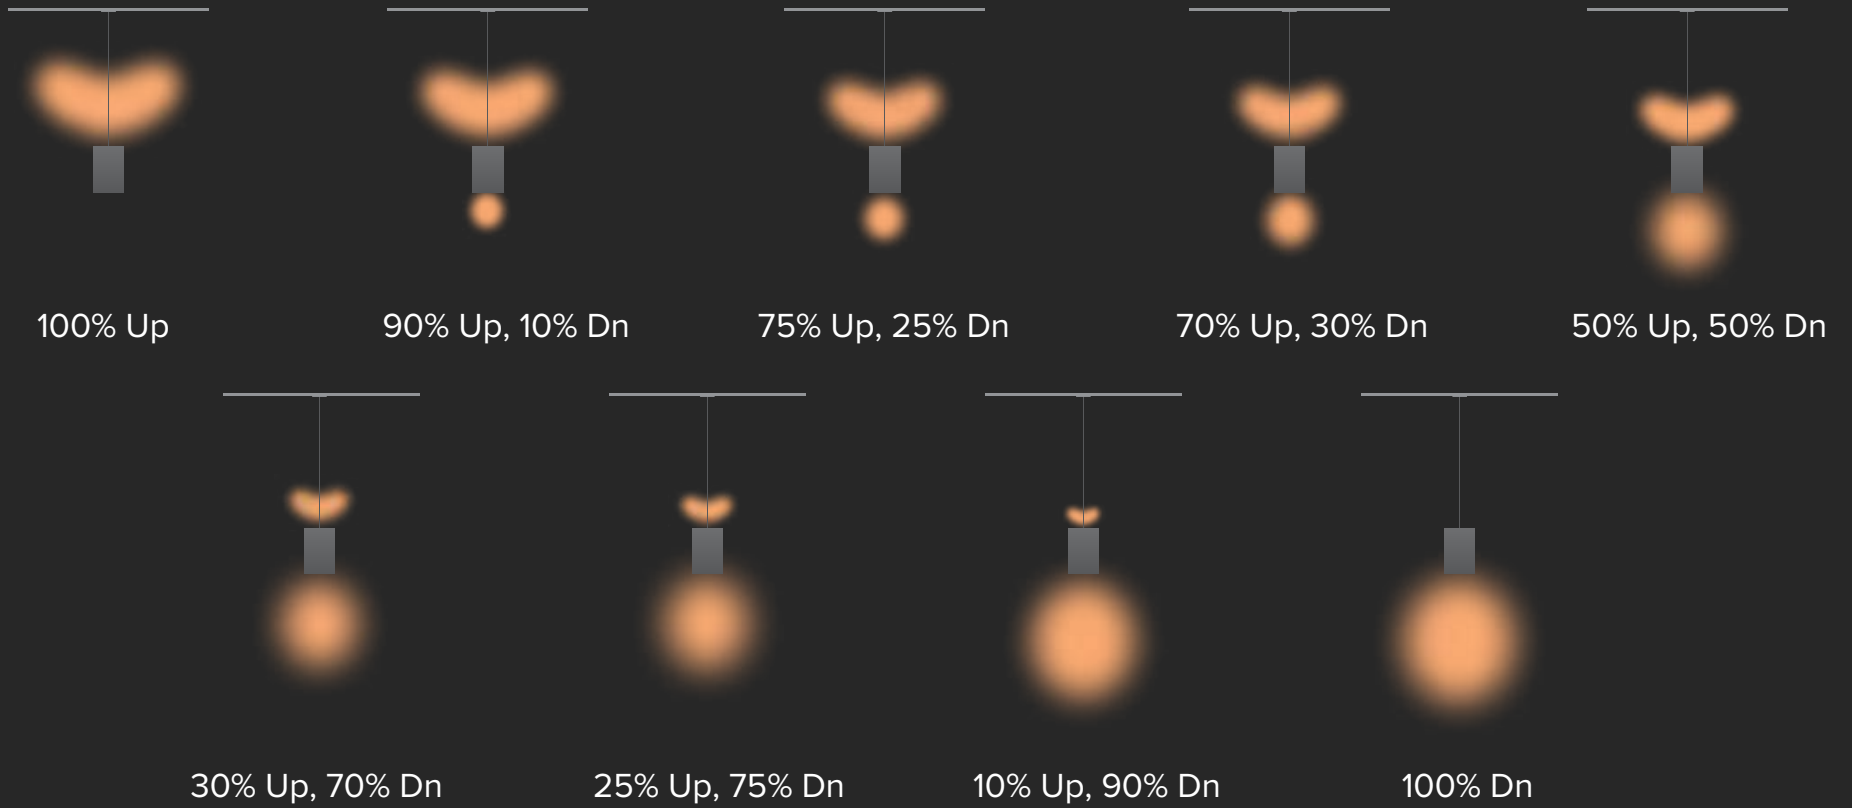


*Reference spec sheet for distributions possible with each type.




Diffuser N (110°)



Low Glare (80°)



Grill (60°) UGR<15



Regressed (75°)



Canopy Style



1.6" Round
(Non Power Feed)



4.5" Round
(Power Feed)



4.5" Round With
Emergency Driver
(Non Power Feed)



5.8" Round With
Occupancy Sensor
(Power Feed)



1.6" Square
(Non Power Feed)




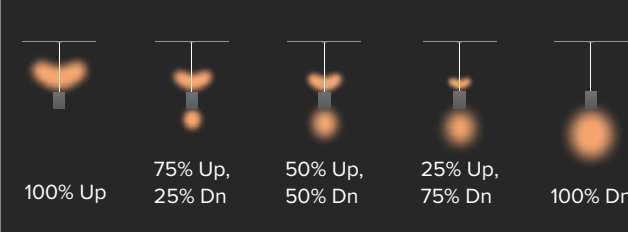










4.5" Square
(Power Feed)



4.5" Square With
Emergency Driver
(Non Power Feed)

The Complete Collection

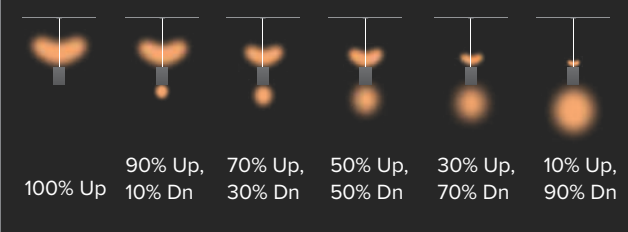PRODUCTS	DIMENSIONS	OPTICS OPTIONS	MOUNTING OPTIONS	LIGHT DISTRIBUTION	Connectors
 <p>1.3" Super Slim Internal Driver</p>	 <p>2.17" 1.3"</p>	<p>Diffuser N Low Glare</p>	 <p>Pendant Surface Wall Mount</p>	 <p>100% Up 75% Up, 25% Dn 50% Up, 50% Dn 25% Up, 75% Dn 100% Dn</p>	<p>"I" Connector "T" Connector "L" Connector "+" Connector "Y" Connector "V" Connector</p>
 <p>1.8" Slim Internal Driver</p>	 <p>2.64" 1.8"</p>	<p>Diffuser</p>	 <p>Pendant Surface</p>	 <p>100% Dn</p>	<p>"I" Connector "T" Connector "L" Connector "+" Connector "Y" Connector "V" Connector</p>
 <p>2.3" Wide Internal Driver</p>	 <p>3.46" 2.3"</p>	<p>Grill Diffuser N Low Glare Regressed</p>	 <p>Pendant Surface Wall Mount Recessed</p>	 <p>100% Up 90% Up, 10% Dn 70% Up, 30% Dn 50% Up, 50% Dn 30% Up, 70% Dn 10% Up, 90% Dn 100% Dn</p> <p>* Light Distribution Selectable</p>	<p>"I" Connector "T" Connector "L" Connector "+" Connector "Y" Connector "V" Connector "Z" Connector</p>

*Wattage Selectable and CCT Selectable
(Only available for 1.8" Slim and 2.3" Wide).