



PROJECT NAME _____

FIXTURE TYPE _____

CATALOG NUMBER _____

ADDITIONAL NOTES _____

STFR Series

Troffer

Applications

- Schools
- Offices
- Hospitals

Highlights

- 80+ CRI
- 50,000 Hours
- Elegant Design
- 5 Year Warranty
- 0-10V Dimmable
- UL, DLC Approved
- Up to 100 Lumens per Watt
- Power Selector to Change Power
- CCT Tunable
(3000K, 3500K, 4000K)



Ordering Guide

Example

LGL-STFR-22-2P-SV

LGL	STFR				
LUMINOS GLOBAL	PRODUCT	SIZE	POWER	VOLTAGE	ADDITIONAL OPTIONS
LGL	STFR	22= (2x2)	2P= (30W, 35W, 40W - 2x2 Only)	SV= (100-277V)	BLANK= (No Additional Options)
		24= (2x4)	4P= (30W, 40W, 50W - 2x4 Only)		EM= (Emergency Back Up)
					MS= (Motion Sensor)
					W= (Pre-Installed 6' Dimmable Whip)



PROJECT NAME _____

FIXTURE TYPE _____

CATALOG NUMBER _____

ADDITIONAL NOTES _____


STFR Series

Troffer


Technical Overview

Performance Summary	Input Voltage	100-277V	
	Input Frequency	50Hz-60Hz	
	Lumen Efficacy	Up to 100 lm/w	
	Light Output (Photopic)	2P	30W- 3,000 lumens
			35W- 3,500 lumens
			40W- 4,000 lumens
		4P	30W- 3,000 lumens
			40W- 4,000 lumens
			50W- 5,000 lumens
	Working Environment	Indoor	
	Beam Angle	120°	
	Kelvin Switch Options	3000K, 3500K, 4000K	
	CRI	80+	
	Power Factor	>0.95	
IP Rating	IP44		
Life Span	50,000 hrs		
Dimming Options	0-10V		
Mounting Options	Recessed		

Dimensions

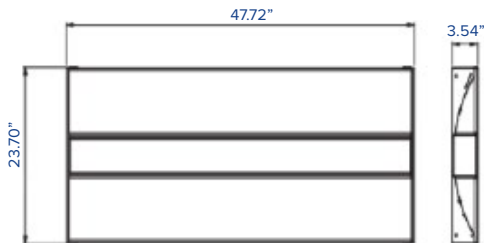

Model LGL-STFR-24

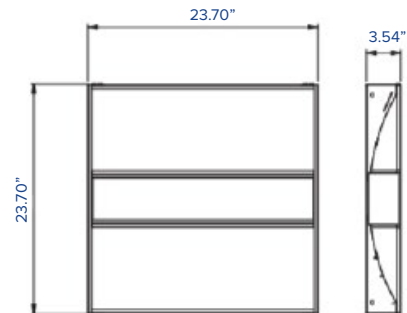

Model LGL-STFR-22