



PROJECT NAME \_\_\_\_\_

FIXTURE TYPE \_\_\_\_\_

CATALOG NUMBER \_\_\_\_\_

ADDITIONAL NOTES \_\_\_\_\_

# FCW Series Wallpack



### Applications

- Walls
- Perimeter Lighting
- Facades

## Highlights

- 50,000 Hours
- 5 Year Warranty
- Weather Resistant
- 125 Lumens per Watt
- Self Contained EM Back Up



## Ordering Guide

Example

LGL-FCW-15-SV-30-N-T3-B-PC

### LGL FCW

LUMINOS GLOBAL	PRODUCT	POWER	VOLTAGE	CCT	DIMMING	DISTRIBUTION	FINISH	ACCESSORIES
LGL	FCW	15= 15W	SV= 100=277V	30= 3000K	D= Dimmable	T3= Type III	B= Black	PC= Photocell
		25= 25W	HV= 340-480V	40= 4000K	N= Non Dimmable		DB= Dark Bronze	EM= Emergency Backup
		30= 30W		50= 5000K			S= Silver	MS= Motion Sensor
		40= 40W		57= 5700K				
		70= 70W						



PROJECT NAME \_\_\_\_\_

FIXTURE TYPE \_\_\_\_\_

CATALOG NUMBER \_\_\_\_\_

ADDITIONAL NOTES \_\_\_\_\_

# FCW Series Wallpack




## Technical Overview


### Performance Summary

Input Voltage	100-277V
Input Frequency	50Hz-60Hz
Lumen Efficacy	125 lm/w
Light Output (Photopic)	15W- 1,875 lumens
	25W- 3,125 lumens
	30W- 3,750 lumens
	40W- 5,000 lumens
	70W- 8,750 lumens
Working Environment	Outdoor
Beam Angle	Type III
Kelvin Switch Options	3000K, 4000K, 5000K, 5700K
CRI	70+
Weight	3.57lbs (15W, 25W & 30W), 6.53lbs (40W & 70W)
Power Factor	>0.95
IP Rating	IP65
Life Span	50,000 hrs
Dimming Options	0-10V
Mounting Options	Surface Mount

## Dimensions

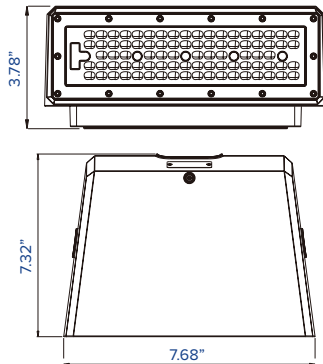

- Model No
- LGL-FCW-15
  - LGL-FCW-25
  - LGL-FCW-30

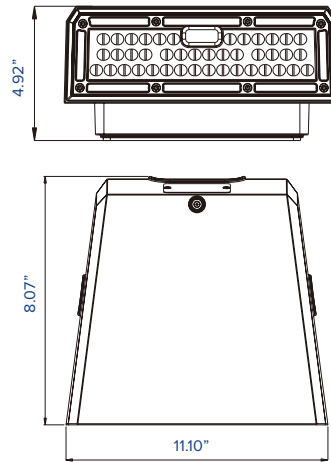

- Model No
- LGL-FCW-40
  - LGL-FCW-70



PROJECT NAME \_\_\_\_\_

FIXTURE TYPE \_\_\_\_\_

CATALOG NUMBER \_\_\_\_\_

ADDITIONAL NOTES \_\_\_\_\_

# FCW Series Wallpack




## Accessories & Mounting

---




Photocell  
120-277Vac input, IP65 rating




Wall mounting

## Photometry

---

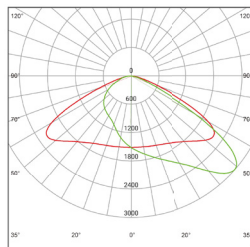

Type III  
30W

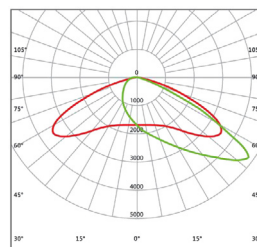

Type III  
40W, 70W