



PROJECT NAME _____

FIXTURE TYPE _____

CATALOG NUMBER _____

ADDITIONAL NOTES _____

VPR Series

Vapor Tight Fixture

Applications

- Car Washes
- Parking Lots
- Gas Stations

Highlights

- Dustproof
- Waterproof
- UL Approved
- 5 Year Warranty
- 50,000 Hours Lifetime
- Up to 160 Lumens per Watt



Ordering Guide

Example

LGL-VPR-20-SV-HO-30-4-8-BT

LGL	VPR								
LUMINOS GLOBAL	PRODUCT	POWER	VOLTAGE	OUTPUT	CCT	SIZE	CRI	CONTROLS	ACCESSORIES
LGL	VPR	20=20W	SV=100-277V	LO=130 (lm/w)	30=3000K	2=2 Ft.	8=80	EM= (Emergency B/Up)	S= (Suspension Cable)
		40=40W	HV=347-480V	HO=160 (lm/w)	40=4000K	4=4 Ft.	9=90	MS= (Motion Sensor)	
		50=50W			50=5000K	5=5 Ft.	95=95	BT= (Bluetooth)	
		65=65W			65=6500K				
		80=80W							



PROJECT NAME _____

FIXTURE TYPE _____

CATALOG NUMBER _____

ADDITIONAL NOTES _____


VPR Series

Vapor Tight Fixture

Technical Overview

Performance Summary	Input Voltage	100-277V, 347-480V	
	Input Frequency	50Hz-60Hz	
	Lumen Efficacy	Up to 160 lm/w	
	Light Output (Photopic)	LO	20W- 2,600 lumens
			40W- 5,200 lumens
			50W- 6,500 lumens
			65W- 8,450 lumens
			80W- 10,400 lumens
			HO
	40W- 6,400 lumens		
	50W- 8,000 lumens		
	65W- 10,400 lumens		
	80W- 12,800 lumens		
	Working Environment	Indoor	
	Beam Angle	120°	
	Kelvin Switch Options	3000K, 4000K, 5000K, 6500K	
	CRI	80+, 90+, 95+	
	Power Factor	>0.9	
	IP Rating	IP65	
Life Span	>80,000 hrs		
Dimming Options	0-10V		
Mounting Options	Surface Mount or Pendant		

Dimensions

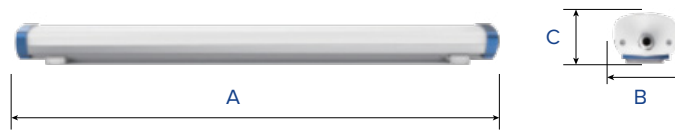

Size A	Size B	Size C
2FT	3.27"	2.17"
4FT	3.27"	2.17"
5FT	3.27"	2.17"