PROJECT NAME

FIXTURE TYPE

CATALOG NUMBER

ADDITIONAL NOTES

RCP Series

Light Control

E475876

Applications

- Parking Facilities
- Large General Areas



Highlights

- 50,000 Hours
- ETL Certified
- 5 Year Warranty
- Optional Diffuser Lens
- Up to 140 Lumens per Watt
- Marine Turtle Safe Option Available

Ordering Guide

Example LGL-RCP-40-SV-HO-7-S-EM-C

LGL	RCP								
LUMINOS GLOBAL	PRODUCT	POWER	VOLTAGE	OUTPUT	CCT	CRI	OPTICS	CONTROLS	MOUNTING
LGL	RCP	40=40W	SV= (100-277V)	HO= (140lm/w)	30= (3000K)	7=70	S= (Standard)	Blank= (No Controls)	Blank= (No Accessories)
		60=60W	HV= (200-480V)		40= (4000K)	8=80	D= (Diffuser Lens)	EM= Emergency Back Up)	C= (Ceiling Mount)
					50= (5000K)			MS= (Motion Sensor)	NPT= (NPT Mount)
					MTS= (Marine Turtle Safe)			DS= (Daylight Sensor)	

PROJECT NAME

FIXTURE TYPE

CATALOG NUMBER

ADDITIONAL NOTES

RCP Series

Light Control


E475876

Technical Overview

Performance Summary

Input Voltage	100-277V, 200-480V
Input Frequency	50Hz-60Hz
Lumen Efficacy	Up to 140 lm/w
Light Output	40W-5,600 lumens
	60W-8,400 lumens
Working Environment	Indoor
Beam Angle	140°
Color Temperature	3000K, 4000K, 5000K, Marine Turtle Safe
CRI	70+, 80+
Power Factor	>0.9
IP Rating	IP65
Life Span	>50,000 hrs.
Dimming Options	0-10V
Mounting Options	Ceiling Mount or NPT Mount

Dimensions

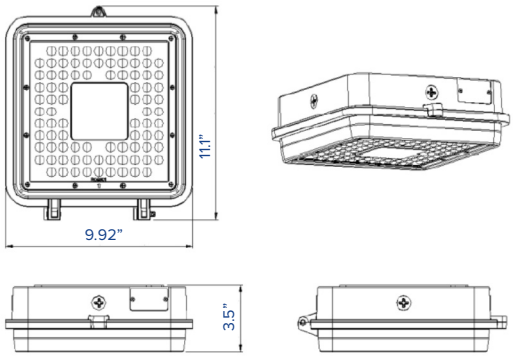

PROJECT NAME

FIXTURE TYPE

CATALOG NUMBER

ADDITIONAL NOTES

RCP Series

Light Control

E475876

Mounting Options



Ceiling Mount



NPT Mount

Optics



Standard



Diffuser Lens

© 2026 Luminos Global, Inc. | www.luminosglobal.com