
GLP SERIES

A Closer Look At Our Versatile High Performance Canopy Light



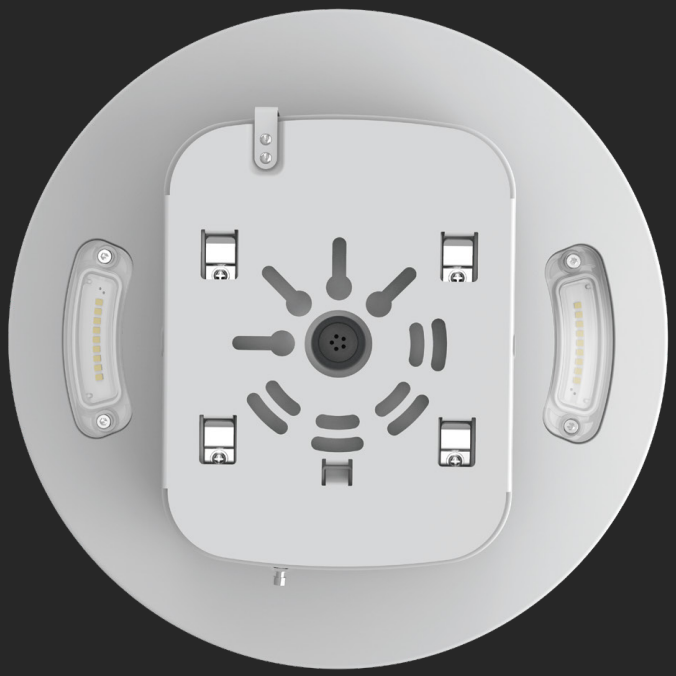

Details

- IP65 & IK08
- 5 Year Warranty
- Type V Distribution
- CCT Selectable
- Marine Turtle Safe Option
- 4 Power Adjustable Options
- Emergency Backup Available High Efficiency up to 165lm/W
- On/Off Uplight Switch Standard
- (5%-10% Uplight)
  3/4” NPT Mount and Surface Mount are available

750 Design Ct. Suite 111, Chula Vista, CA 91911 info@luminosglobal.com www.luminosglobal.com (619) 781-8650

Specifications

Input Voltage	120-277V, 120-347V
Input Frequency	50Hz-60Hz
Lumen Efficacy	Up to 165 lm/w
Light Output	25W- 4,125 lumens 40W- 6,600 lumens 60W- 9,900 lumens 80W- 13,200 lumens 100W- 16,500 lumens
Working Environment	Outdoor
Beam Angle	Type V
Color Temperature	3000K, 3500K, 4000K, 5000K, Marine Turtle Safe
CRI	70+, 80+
Power Factor	>0.9
IP Rating	IP65
Life Span	L70>150,000 hrs
Operating Temperature	25, 40, 60, 80W (-22 to 122°F) and 100W (-22 to 113°F)
Mounting Options	Surface Mount or Conduit Mount
Weight	25, 40, 60W (6.1 lb) and 80,100W (8.4 lb)

Mounting



Surface Mount




3/4” NPT Mount

750 Design Ct. Suite 111, Chula Vista, CA 91911 info@luminosglobal.com www.luminosglobal.com (619) 781-8650


LuminosGlobal LIGHTING


Next Level

Dimensions

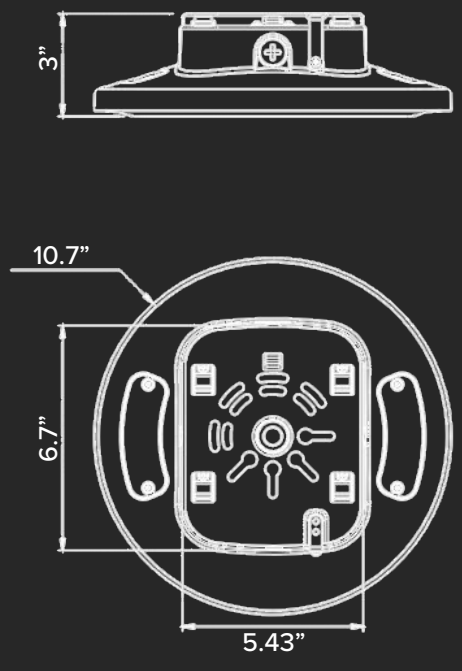


25W/40W/60W

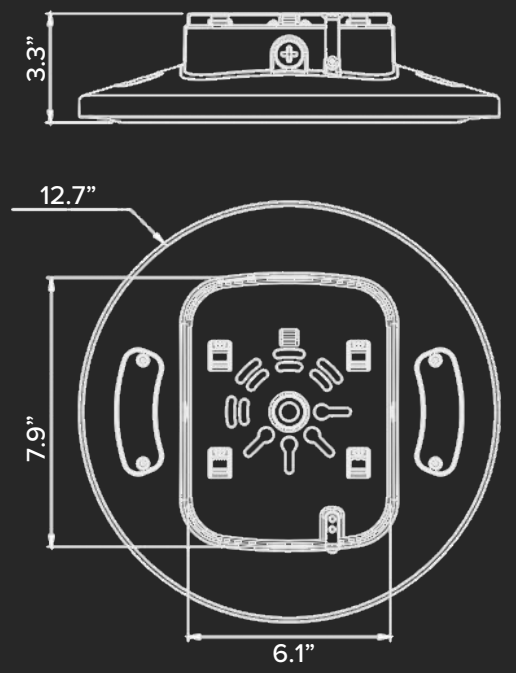

80W/100W

Uplight Feature

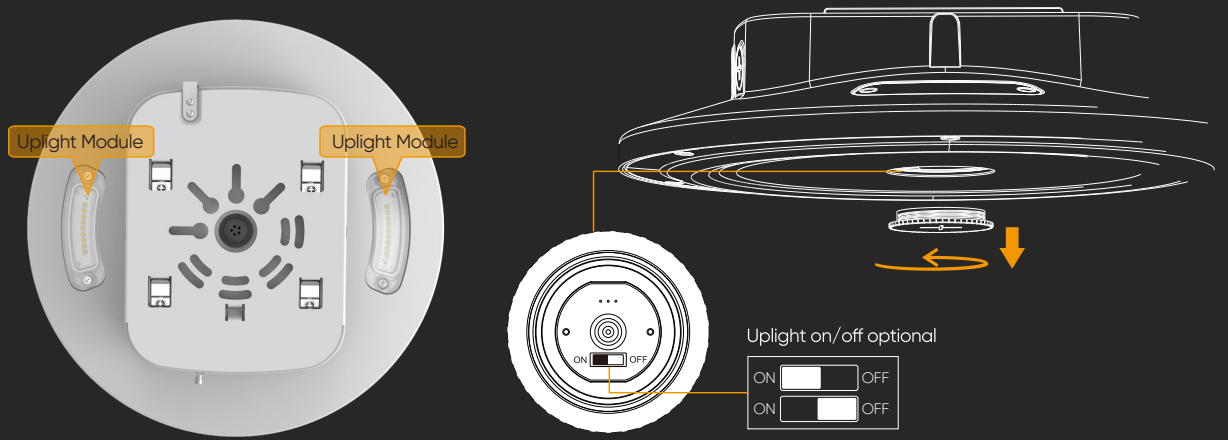


750 Design Ct. Suite 111, Chula Vista, CA 91911 info@luminosglobal.com www.luminosglobal.com (619) 781-8650

LuminosGlobal LIGHTING

Power & CCT Selectable


- 3 CCT Adjustable

3500K, 4000K, 5000K adjustable
*3000K Optional

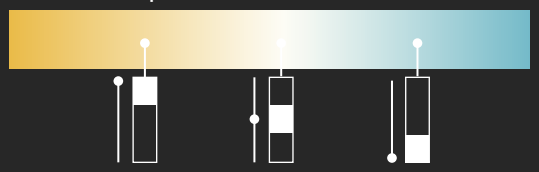



- 4 Wattage Adjustable

30%, 50%, 75%, 100% adjustable

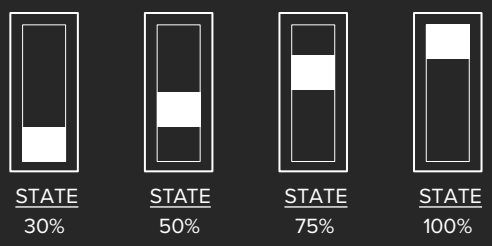

Power	100%	75%	50%	30%
25W	25W	19W	13W	7.5W
40W	40W	30W	20W	12W
60W	60W	45W	30W	18W
80W	80W	60W	40W	24W
100W	100W	75W	50W	30W

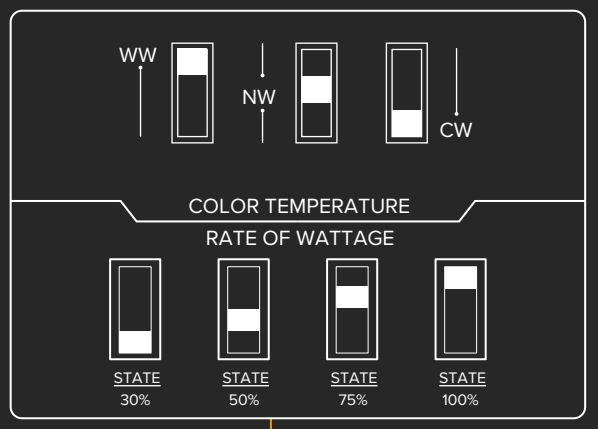


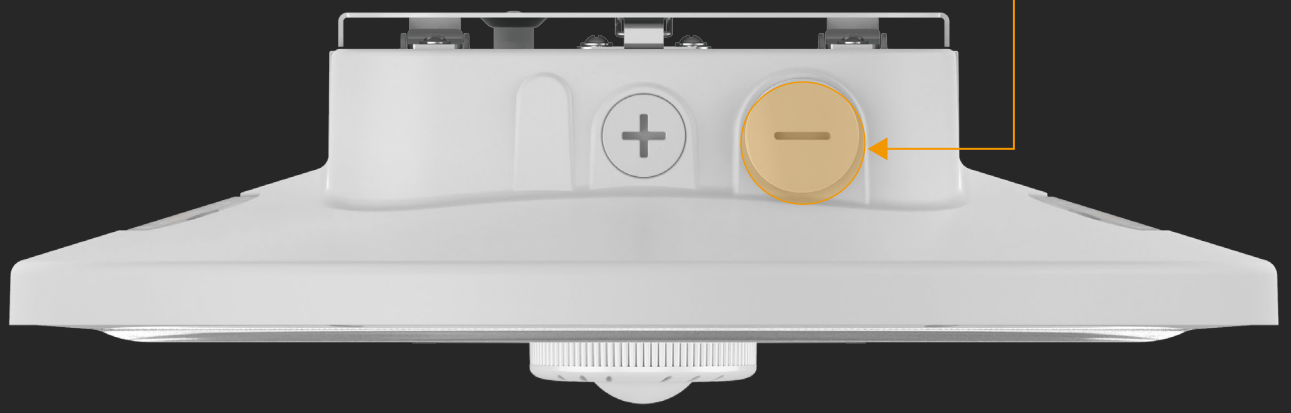

750 Design Ct. Suite 111, Chula Vista, CA 91911 info@luminosglobal.com www.luminosglobal.com (619) 781-8650

LuminosGlobal LIGHTING

Accessories

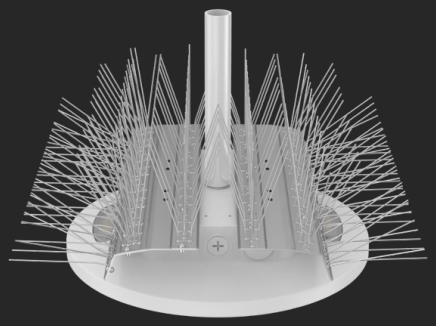

Bird Spikes



Wire Guard



House Side Shield



Emergency Backup Battery



Microwave Motion Sensor




PIR Sensor

750 Design Ct. Suite 111, Chula Vista, CA 91911 info@luminosglobal.com www.luminosglobal.com (619) 781-8650


Photometrics

25W/40W/60W Beam Angle

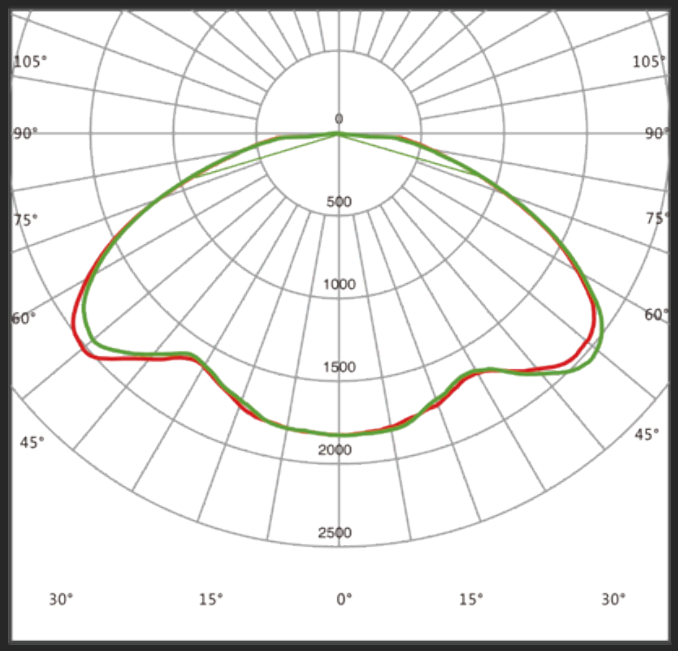

Type V

80W/100W Beam Angle

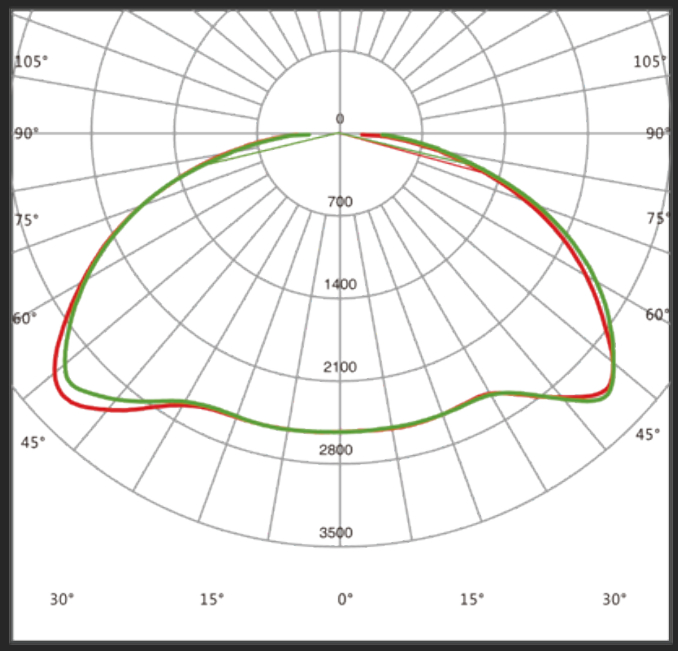

Type V

750 Design Ct. Suite 111, Chula Vista, CA 91911 info@luminosglobal.com www.luminosglobal.com (619) 781-8650