
A Closer Look At High End Track System

LIV SERIES - TRACK SYSTEM

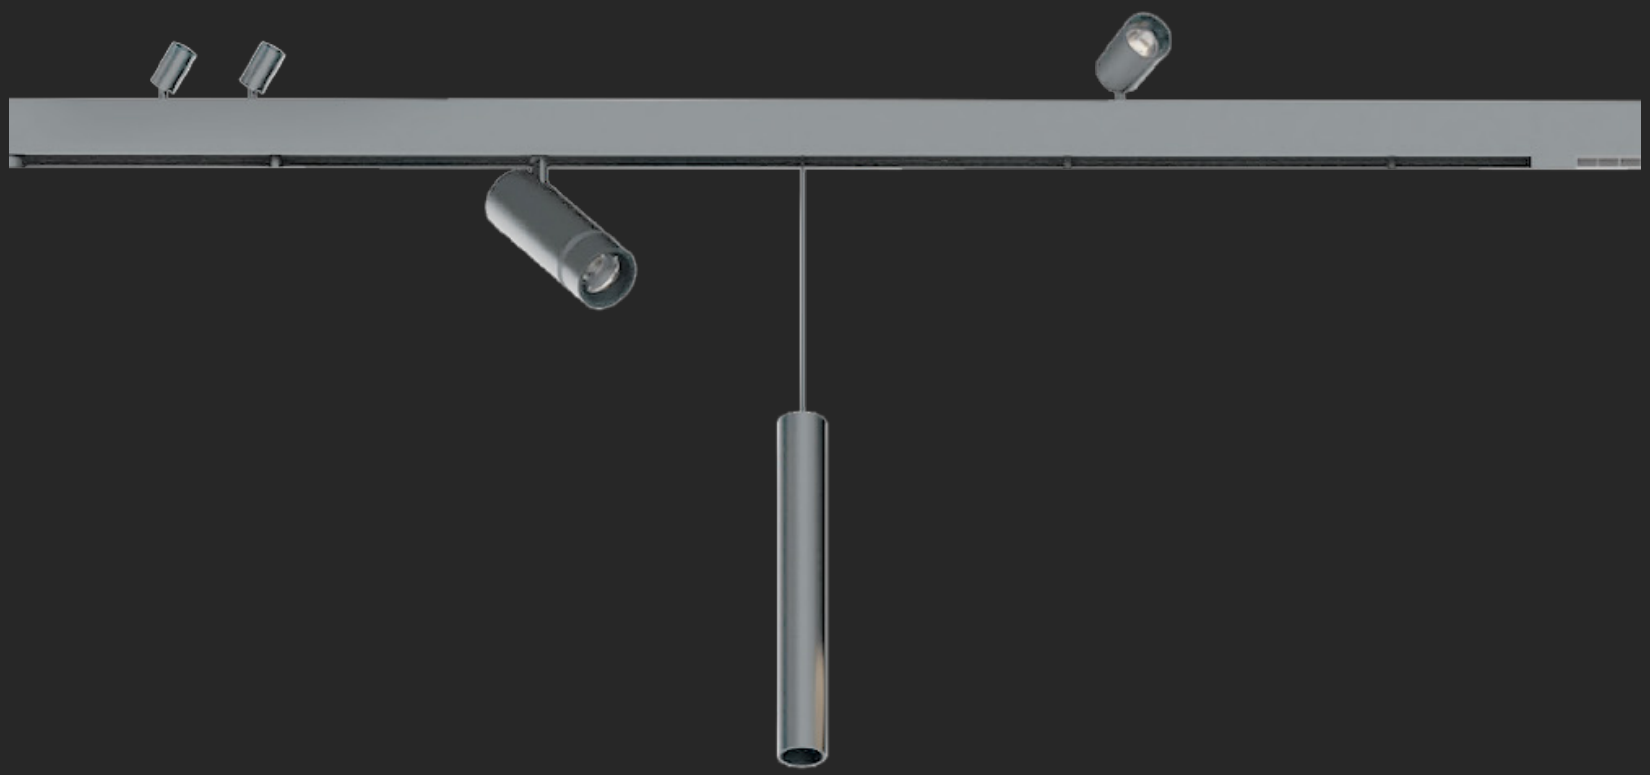

750 Design Ct. Suite 111, Chula Vista, CA 91911 info@luminosglobal.com www.luminosglobal.com (619) 781-8650


LuminosGlobal LIGHTING

Track Types

Surface-mounted Track



LIV-SM
Surface-Mounted




LIV-SM2
Standard Track

Pendant Track




LIV-P-UD
Downward & Upward Lighting




LIV-P
Standard Track


Recessed Track




LIV-R1
With Trim




LIV-R2
Compatible with ½" Ceiling



LIV-R3
Easy Installation



LIV-R4
With adjustable Trimless Recessed Installation Kit



LIV-R5
Compatible with Various Thickness of Ceiling

750 Design Ct. Suite 111, Chula Vista, CA 91911 info@luminosglobal.com www.luminosglobal.com (619) 781-8650

LuminosGlobal LIGHTING

Technical Information


Input Voltage	48V
Input Frequency	50-60Hz
Lumen Efficacy	Up to 110 lm/w
Working Environment	Indoor
Beam Angles Available	15°, 18°, 20°, 24°, 25°, 30°, 35°, 36°, 45°, 50° 55°, 60°, 65°, 110°, 120°, 180°, Wall Washer
CRI	90+
Power Factor	<0.98
Insert Options	Spotlight, Accent, General Light, Comfort Lights, Wall Washer, Downlight, Decorative
Dimming Options	0-10V, DALI
Life Span	>50,000 hrs
Mounting Options	Spotlight, Accent, General Light, Comfort Light, Wall Washer, Downlight, Decorative

750 Design Ct. Suite 111, Chula Vista, CA 91911 info@luminosglobal.com www.luminosglobal.com (619) 781-8650

LuminosGlobal LIGHTING


Installation

Surface-Mounted Track




Code: LIV-SM
Description: Surface-mounted
Length: 3.28/6.56/9.84(ft)
Color: RAL9005 black, RAL9016 white

Surface-Mounted Track




Code: LIV-SM2
Description: Standard
Length: 3.28/6.56/9.84(ft)
Color: RAL9005 black, RAL9016 white

Suspended Track




Code: LIV-P
Description: Standard
Length: 3.28/6.56/9.84(ft)
Color: RAL9005 black, RAL9016 white

Suspended Track




Code: LIV-P-UD
Description: Downward & upward lighting
Length: 3.28/6.56/9.84(ft)
Color: RAL9005 black, RAL9016 white

Recessed Track




Code: LIV-R1
Description: With trim
Length: 3.28/6.56/9.84(ft)
Color: RAL9005 black, RAL9016 white

Recessed Track




Code: LIV-R2
Description: Compatible with 1/2” ceiling
Length: 3.28/6.56/9.84(ft)
Color: RAL9005 black, RAL9016 white

Recessed Track




Code: LIV-R3
Description: Easy installation
Length: 3.28/6.56/9.84(ft)
Color: RAL9005 black, RAL9016 white

Recessed Track



Code: LIV-P-R4
Description: With adjustable trimless recessed installation kit
Length: 3.28/6.56/9.84(ft)
Color: RAL9005 black, RAL9016 white
*Compatible with the ceiling of thickness between 0.49”-0.80”



Code: LIV-R5
Description: Compatible with various thickness of ceiling
Length: 3.28/6.56/9.84(ft)
Color: RAL9005 black, RAL9016 white
*Compatible with the ceiling of thicknes: 0.19”/0.35”/0.49”/0.59”/0.70”/0.79”/0.98”

750 Design Ct. Suite 111, Chula Vista, CA 91911 info@luminosglobal.com www.luminosglobal.com (619) 781-8650

LuminosGlobal LIGHTING

Track Inserts

Spotlight Insert



LIV-TR-3W



LIV-TR-5W



LIV-TR-8W



LIV-TR-16W



LIV-TR-12W



LIV-TR-24W



LIV-TR-10W




LIV-TR-19W




LIV-TRC-9W

LIV-TR-26W

Accent Light Insert




LIV-BAR-3W




LIV-BAR-7W




LIV-BAR-9W




LIV-BAR-13W



LIV-BAR-A-13W



LIV-BAR-A-15W



LIV-BAR-S-13W
LIV-BAR-S-26W

*Black color is used in this catalog for design purposes, but fixtures come in different colors.

750 Design Ct. Suite 111, Chula Vista, CA 91911 info@luminosglobal.com www.luminosglobal.com (619) 781-8650

LuminosGlobal LIGHTING

Track Inserts

General light insert



LIV-BIR-7W
LIV-BIR-13W
LIV-BIR-19W
LIV-BIR-26W



LIIV-ABR-7W



LIV-ABR-8W



LIV-PBR-13W

Comfort light insert



LIV-CBR-7W
LIV-CBR-13W
LIV-CBR-19W
LIV-CBR-26W

Wall washer insert



LIV-WW-7W
LIV-WW-14W

Downlight insert



LIV-RD-10W



LIV-RD-20W

Decorative light insert



LIV-BLL-10W



LIV-PDL-18W



LIV-CB-5W



LIV-DSK-9W



LIV-PC-12W



LIV-PC-14W

*Black color is used in this catalog for design purposes, but fixtures come in different colors.

750 Design Ct. Suite 111, Chula Vista, CA 91911 info@luminosglobal.com www.luminosglobal.com (619) 781-8650

LuminosGlobal LIGHTING







